

**graph twoway histogram** — Histogram plots[Description](#)[Menu](#)[Options for use in the discrete case](#)[Options for use in both cases](#)[References](#)[Quick start](#)[Syntax](#)[Options for use in the continuous case](#)[Remarks and examples](#)[Also see](#)

## Description

`twoway histogram` draws histograms of *varname*. Also see [\[R\] histogram](#) for an easier-to-use alternative.

## Quick start

Histogram of continuous variable `v1`

```
twoway histogram v1
```

Histogram of categorical variable `v2`

```
twoway histogram v2, discrete
```

Same as above, but place a gap between the bars by reducing bar width by 15%

```
twoway histogram v2, discrete gap(15)
```

Same as above, but with separate graph areas for each level of `catvar`

```
twoway histogram v2, discrete gap(15) by(catvar)
```

Same as above, and place graph areas in a single column

```
twoway histogram v2, discrete gap(15) by(catvar, cols(1))
```

Histogram of `v1` with bars scaled to reflect the number of observations in each bin

```
twoway histogram v1, frequency
```

Same as above, but with horizontal bars

```
twoway histogram v1, frequency horizontal
```

Histogram of `v1` with 10 bins

```
twoway histogram v1, bins(10)
```

Specify that the *y* axis should have markers and labels at 0, 25, 50, 75, and 100

```
twoway histogram v1, ylabel(0(25)100)
```

## Menu

Graphics > Twoway graph (scatter, line, etc.)

## Syntax

```
twoway histogram varname [if] [in] [weight]
    [, [discrete_options | continuous_options] common_options]
```

<i>discrete_options</i>	Description
<u>d</u> iscrete	specify that data are discrete
<u>w</u> idth(#)	width of bins in <i>varname</i> units
<u>s</u> tart(#)	theoretical minimum value
<i>continuous_options</i>	Description
<u>b</u> ins(#)	# of bins
<u>w</u> idth(#)	width of bins in <i>varname</i> units
<u>s</u> tart(#)	lower limit of first bin
<i>common_options</i>	Description
<u>d</u> ensity	draw as density; the default
<u>f</u> raction	draw as fractions
<u>f</u> requency	draw as frequencies
<u>p</u> ercent	draw as percents
<u>v</u> ertical	vertical bars; the default
<u>h</u> orizontal	horizontal bars
<u>g</u> ap(#)	reduce width of bars, $0 \leq \# < 100$
<i>barlook_options</i>	change look of bars
<i>axis_choice_options</i>	associate plot with alternative axis
<i>twoway_options</i>	titles, legends, axes, added lines and text, by, regions, name, aspect ratio, etc.

*fweights* are allowed; see [U] 11.1.6 [weight](#).

## Options for use in the discrete case

`discrete` specifies that *varname* is discrete and that each unique value of *varname* be given its own bin (bar of histogram).

`width(#)` is rarely specified in the discrete case; it specifies the width of the bins. The default is `width(d)`, where *d* is the observed minimum difference between the unique values of *varname*.

Specify `width()` if you are concerned that your data are sparse. For example, *varname* could in theory take on the values 1, 2, 3, ..., 9, but because of sparseness, perhaps only the values 2, 4, 7, and 8 are observed. Here the default width calculation would produce `width(2)`, and you would want to specify `width(1)`.

`start(#)` is also rarely specified in the discrete case; it specifies the theoretical minimum value of *varname*. The default is `start(m)`, where *m* is the observed minimum value.

As with `width()`, specify `start()` when you are concerned about sparseness. In the previous example, you would also want to specify `start(1)`. `start()` does nothing more than add white space to the left side of the graph.

`start()`, if specified, must be less than or equal to *m*, or an error will be issued.

## Options for use in the continuous case

`bins(#)` and `width(#)` are alternatives that specify how the data are to be aggregated into bins. `bins()` specifies the number of bins (from which the width can be derived), and `width()` specifies the bin width (from which the number of bins can be derived).

If neither option is specified, the results are the same as if `bins(k)` were specified, where

$$k = \min\left(\sqrt{N}, 10 \times \frac{\ln(N)}{\ln(10)}\right)$$

and where *N* is the number of nonmissing observations of *varname*.

`start(#)` specifies the theoretical minimum of *varname*. The default is `start(m)`, where *m* is the observed minimum value of *varname*.

Specify `start()` when you are concerned about sparse data. For instance, you might know that *varname* can go down to 0, but you are concerned that 0 may not be observed.

`start()`, if specified, must be less than or equal to *m*, or an error will be issued.

## Options for use in both cases

`density`, `fraction`, `frequency`, and `percent` are alternatives that specify whether you want the histogram scaled to density, fractional, or frequency units, or percentages. `density` is the default.

`density` scales the height of the bars so that the sum of their areas equals 1.

`fraction` scales the height of the bars so that the sum of their heights equals 1.

`frequency` scales the height of the bars so that each bar's height is equal to the number of observations in the category, and thus the sum of the heights is equal to the total number of nonmissing observations of *varname*.

`percent` scales the height of the bars so that the sum of their heights equals 100.

`vertical` and `horizontal` specify whether the bars are to be drawn vertically (the default) or horizontally.

`gap(#)` specifies that the bar width be reduced by # percent. `gap(0)` is the default; `histogram` sets the width so that adjacent bars just touch. If you wanted gaps between the bars, you would specify, for instance, `gap(5)`.

Also see [\[G-2\] graph twoway rbar](#) for other ways to set the display width of the bars. Histograms are actually drawn using `twoway rbar` with a restriction that 0 be included in the bars; `twoway histogram` will accept any options allowed by `twoway rbar`.

*barlook\_options* set the look of the bars. The most important of these options is `color` (*colorstyle*), which specifies the color and opacity of the bars; see [G-4] *colorstyle* for a list of color choices. See [G-3] *barlook\_options* for information on the other *barlook\_options*.

*axis\_choice\_options* associate the plot with a particular *y* or *x* axis on the graph; see [G-3] *axis\_choice\_options*.

*twoway\_options* are a set of common options supported by all *twoway* graphs. These options allow you to title graphs, name graphs, control axes and legends, add lines and text, set aspect ratios, create graphs over `by()` groups, and change some advanced settings. See [G-3] *twoway\_options*.

## Remarks and examples

[stata.com](http://www.stata.com)

Remarks are presented under the following headings:

*Relationship between graph twoway histogram and histogram*

*Typical use*

*Use with by()*

*History*

### Relationship between graph twoway histogram and histogram

`graph twoway histogram`—documented here—and `histogram`—documented in [R] *histogram*—are almost the same command. `histogram` has the advantages that


1. it allows overlaying of a normal density or a kernel estimate of the density;
2. if a density estimate is overlaid, it scales the density to reflect the scaling of the bars.

`histogram` is implemented in terms of `graph twoway histogram`.

## Typical use


When you do not specify otherwise, `graph twoway histogram` assumes that the variable is continuous:

```
. use https://www.stata-press.com/data/r18/lifeexp
(Life expectancy, 1998)
. twoway histogram le
```

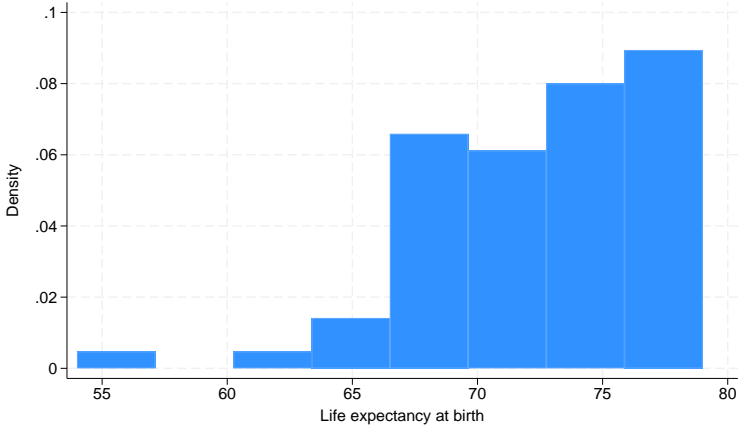

Even with a continuous variable, you may specify the `discrete` option to see the individual values:


```
. twoway histogram le, discrete
```

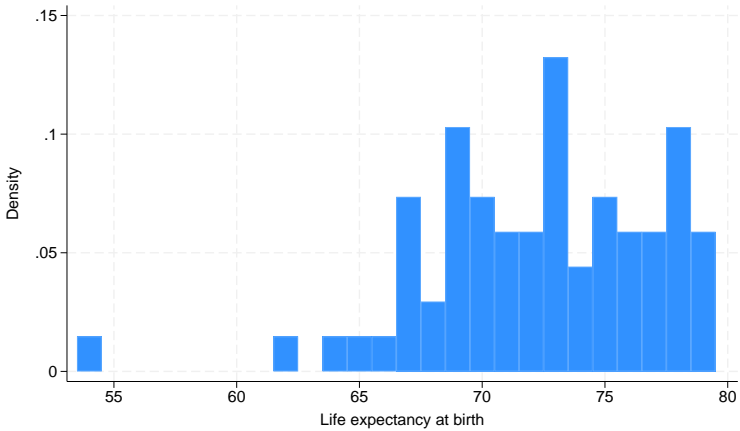

## Use with by()

graph twoway histogram may be used with by():


```
. use https://www.stata-press.com/data/r18/lifeexp, clear
(Life expectancy, 1998)
. twoway histogram le, discrete by(region, total)
```

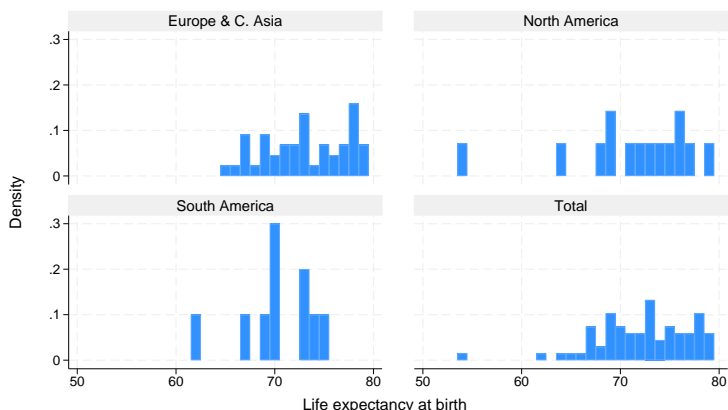

Graphs by Region

Here specifying frequency is a good way to show both the distribution and the overall contribution to the total:

```
. twoway histogram le, discrete freq by(region, total)
```

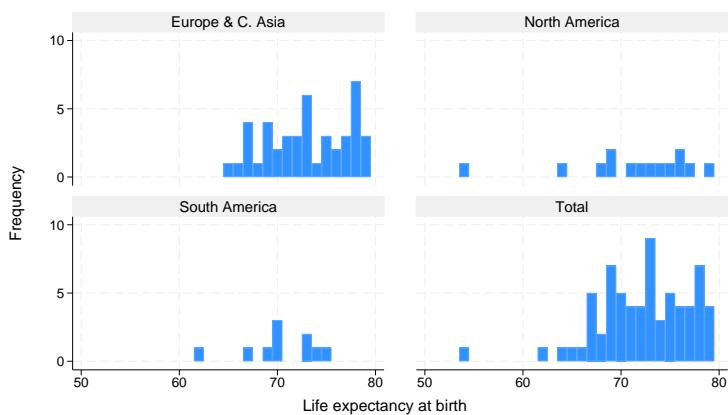

Graphs by Region

The height of the bars reflects the number of countries. Here—and in all the above examples—we would do better by obtaining population data on the countries and then typing

```
. twoway histogram le [fw=pop], discrete freq by(region, total)
```

so that bar height reflected total population.

## History

According to [Beniger and Robyn \(1978, 4\)](#), although A. M. Guerry published a histogram in 1833, the word “histogram” was first used by Karl Pearson in 1895.

## References

- Beniger, J. R., and D. L. Robyn. 1978. Quantitative graphics in statistics: A brief history. *American Statistician* 32: 1–11. <https://doi.org/10.2307/2683467>.
- Cox, N. J. 2005. Speaking Stata: Density probability plots. *Stata Journal* 5: 259–273.
- . 2007. Software Updates: Speaking Stata: Density probability plots. *Stata Journal* 7: 593.
- Guerry, A.-M. 1833. *Essai sur la Statistique Morale de la France*. Paris: Crochard.
- Harrison, D. A. 2005. *Stata tip 20: Generating histogram bin variables*. *Stata Journal* 5: 280–281.
- Pearson, K. 1895. Contributions to the mathematical theory of evolution—II. Skew variation in homogeneous material. *Philosophical Transactions of the Royal Society of London, Series A* 186: 343–414. <https://doi.org/10.1098/rsta.1895.0010>.

## Also see

[R] [histogram](#) — Histograms for continuous and categorical variables

[G-2] [graph twoway kdensity](#) — Kernel density plots

Stata, Stata Press, and Mata are registered trademarks of StataCorp LLC. Stata and Stata Press are registered trademarks with the World Intellectual Property Organization of the United Nations. StataNow and NetCourseNow are trademarks of StataCorp LLC. Other brand and product names are registered trademarks or trademarks of their respective companies. Copyright © 1985–2023 StataCorp LLC, College Station, TX, USA. All rights reserved.



For suggested citations, see the FAQ on [citing Stata documentation](#).