

**dotplot** — Comparative distribution dotplots[Description](#)  
[Options](#)  
[Reference](#)[Quick start](#)  
[Remarks and examples](#)[Menu](#)  
[Stored results](#)[Syntax](#)  
[Acknowledgments](#)

## Description

A dotplot is a scatterplot with values grouped together vertically (“binning”, as in a histogram) and with plotted points separated horizontally. The aim is to display all the data for several variables or groups in one compact graphic.

## Quick start

Dotplot of `v1`

```
dotplot v1
```

Columns with separate dotplots of `v1` for each level of categorical variable `a`

```
dotplot v1, over(a)
```

Same as above, but with the dots centered in each column

```
dotplot v1, over(a) center
```

Dotplots for `v1`, `v2`, and `v3` in separate columns

```
dotplot v1 v2 v3
```

Add a horizontal line of pluses at the mean of each variable

```
dotplot v1 v2 v3, mean
```

Add pluses for the medians and dashed lines for the upper and lower quartiles

```
dotplot v1 v2 v3, median bar
```

## Menu

Graphics > Distributional graphs > Distribution dotplot

## Syntax

Dotplot of *varname*, with one column per value of *groupvar*

```
dotplot varname [if] [in] [, options]
```

Dotplot for each variable in *varlist*, with one column per variable

```
dotplot varlist [if] [in] [, options]
```

*options*

Description

<i>options</i>	Description
Options	
<code>over(<i>groupvar</i>)</code>	display one columnar dotplot for each value of <i>groupvar</i>
<code>nx(#)</code>	horizontal dot density; default is <code>nx(0)</code>
<code>ny(#)</code>	vertical dot density; default is <code>ny(35)</code>
<code>incr(#)</code>	label every # group; default is <code>incr(1)</code>
<code>mean median</code>	plot a horizontal line of pluses at the mean or median
<code>bounded</code>	use minimum and maximum as boundaries
<code>bar</code>	plot horizontal dashed lines at shoulders of each group
<code>nogroup</code>	use the actual values of <i>yvar</i>
<code>center</code>	center the dot for each column
Plot	
<code>marker_options</code>	change look of markers (color, size, etc.)
<code>marker_label_options</code>	add marker labels; change look or position
Y axis, X axis, Titles, Legend, Overall	
<code>twoway_options</code>	any options other than <code>by()</code> documented in [G-3] <code>twoway_options</code>
collect is allowed; see [U] 11.1.10 Prefix commands.	

## Options

### Options

`over(groupvar)` identifies the variable for which `dotplot` will display one columnar dotplot for each value of *groupvar*. `over()` may not be specified in the second syntax.

`nx(#)` sets the horizontal dot density. A larger value of # will increase the dot density, reducing the horizontal separation between dots. This option will increase the separation between columns if two or more groups or variables are used.

`ny(#)` sets the vertical dot density (number of “bins” on the *y* axis). A larger value of # will result in more bins and a plot that is less spread out horizontally. # should be determined in conjunction with `nx()` to give the most pleasing appearance.

`incr(#)` specifies how the *x* axis is to be labeled. `incr(1)`, the default, labels all groups. `incr(2)` labels every second group.

`[mean|median]` plots a horizontal line of pluses at the mean or median of each group.

`bounded` forces the minimum and maximum of the variable to be used as boundaries of the smallest and largest bins. It should be used with one variable whose support is not the whole of the real line and whose density does not tend to zero at the ends of its support, for example, a uniform random variable or an exponential random variable.

`bar` plots horizontal dashed lines at the “shoulders” of each group. The shoulders are taken to be the upper and lower quartiles unless `mean` has been specified; here they will be the mean plus or minus the standard deviation.

`nogroup` uses the actual values of `yvar` rather than grouping them (the default). This option may be useful if `yvar` takes on only a few values.

`center` centers the dots for each column on a hidden vertical line.

#### Plot

`marker_options` affect the rendition of markers drawn at the plotted points, including their shape, size, color, and outline; see [G-3] [marker\\_options](#).

`marker_label_options` specify if and how the markers are to be labeled; see [G-3] [marker\\_label\\_options](#). `marker_label_options` are not allowed if `varlist` is specified.

#### Y axis, X axis, Titles, Legend, Overall

`twoway_options` are any of the options documented in [G-3] [twoway\\_options](#), excluding `by()`. These include options for titling the graph (see [G-3] [title\\_options](#)) and for saving the graph to disk (see [G-3] [saving\\_option](#)).

## Remarks and examples


[stata.com](http://www.stata.com)

`dotplot` produces a figure that has elements of a boxplot, a histogram, and a scatterplot. Like a boxplot, it is most useful for comparing the distributions of several variables or the distribution of 1 variable in several groups. Like a histogram, the figure provides a crude estimate of the density, and, as with a scatterplot, each symbol (dot) represents 1 observation.

### ► Example 1

`dotplot` may be used as an alternative to Stata’s histogram graph for displaying the distribution of one variable.


```
. set seed 123456789
. set obs 1000
. generate norm = rnormal()
. dotplot norm, title("Normal distribution, sample size 1000")
```

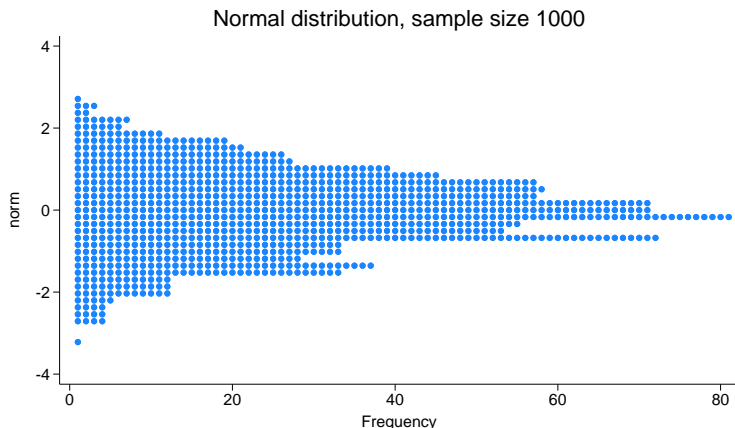

► Example 2

The `over()` option lets us use `dotplot` to compare the distribution of one variable within different levels of a grouping variable. The `center`, `median`, and `bar` options create a graph that may be compared with Stata's boxplot; see [G-2] [graph box](#). The next graph illustrates this option with Stata's automobile dataset.


```
. use https://www.stata-press.com/data/r18/auto, clear
(1978 automobile data)
. dotplot mpg, over(foreign) nx(25) ny(10) center median bar
```

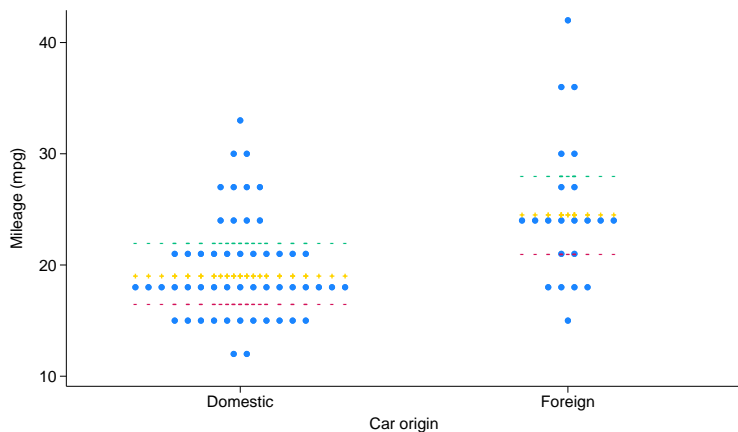

### ► Example 3

The second version of `dotplot` lets us compare the distribution of several variables. In the next graph, all 10 variables contain measurements on tumor volume.

```
. use https://www.stata-press.com/data/r18/dotgr
. dotplot g1r1-g1r10, ytitle("Tumor volume, cu mm")
```

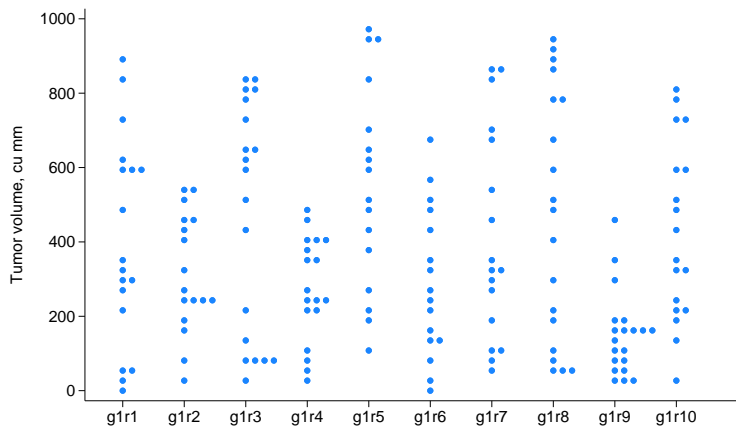


◀

### ► Example 4

When using the first form with the `over()` option, we can encode a third dimension in a dotplot by using a different plotting symbol for different groups. The third dimension cannot be encoded with a varlist. The example is of a hypothetical matched case-control study. The next graph shows the exposure of each individual in each matched stratum. Cases are marked by the letter 'x', and controls are marked by the letter 'o'.

```
. use https://www.stata-press.com/data/r18/dotdose
. label define symbol 0 "o" 1 "x"
. label values case symbol
```

```
. dotplot dose, over(strata) m(none) mlabel(case) mlabp(0) center
```

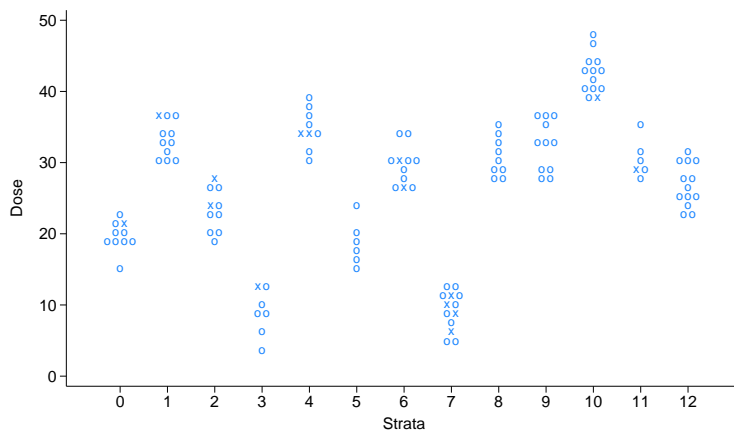


◀

### ▷ Example 5

dotplot can also be used with two virtually continuous variables as an alternative to jittering the data to distinguish ties. We must use the `xlabel()` option, because otherwise dotplot will attempt to label too many points on the  $x$  axis. It is often useful in such instances to use a value of `nx` that is smaller than the default. That was not necessary in this example, partly because of our choice of symbols.

```
. use https://www.stata-press.com/data/r18/auto, clear
(1978 automobile data)
. generate byte hi_price = (price>10000) if price < .
. label define symbol 0 "|" 1 "o"
. label values hi_price symbol
. dotplot weight, over(gear_ratio) m(none) mlabel(hi_price) mlabp(0) center
> xlabel(#5)
```

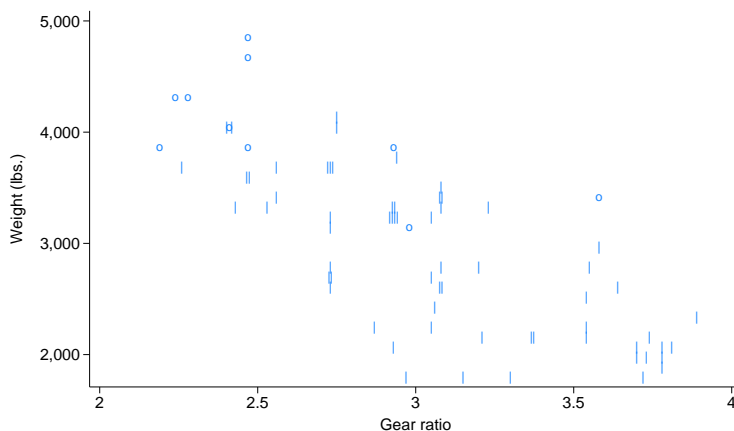


◀

## ▶ Example 6

The following figure is included mostly for aesthetic reasons. It also demonstrates `dotplot`'s ability to cope with even very large datasets. The sample size for each variable is 10,000, so it may take a long time to print.

```
. clear all
. set seed 123456789
. set obs 10000
. generate norm0 = rnormal()
. generate norm1 = rnormal() + 1
. generate norm2 = rnormal() + 2
. label variable norm0 "N(0,1)"
. label variable norm1 "N(1,1)"
. label variable norm2 "N(2,1)"
. dotplot norm0 norm1 norm2
```

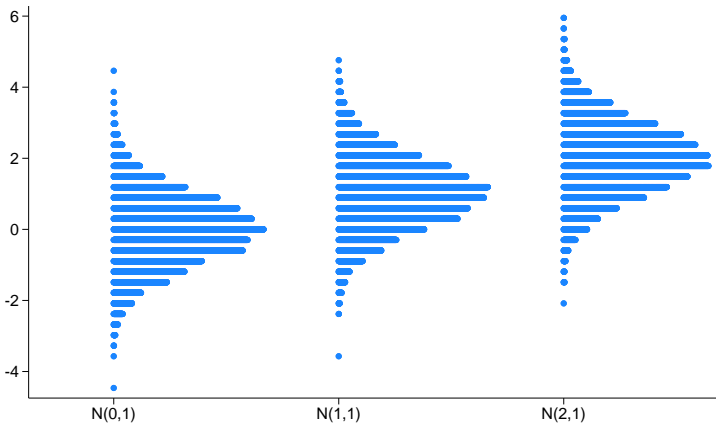

◀

## Stored results

`dotplot` stores the following in `r()`:

Scalars

<code>r(nx)</code>	horizontal dot density
<code>r(ny)</code>	vertical dot density

## Acknowledgments

`dotplot` was written by Peter Sasieni of the King's Clinical Trials Unit at King's College London, and Patrick Royston of the MRC Clinical Trials Unit, London, and coauthor of the Stata Press book *Flexible Parametric Survival Analysis Using Stata: Beyond the Cox Model*.

## Reference

Sasieni, P. D., and P. Royston. 1996. Dotplots. *Applied Statistics* 45: 219–234. <https://doi.org/10.2307/2986156>.

Stata, Stata Press, and Mata are registered trademarks of StataCorp LLC. Stata and Stata Press are registered trademarks with the World Intellectual Property Organization of the United Nations. StataNow and NetCourseNow are trademarks of StataCorp LLC. Other brand and product names are registered trademarks or trademarks of their respective companies. Copyright © 1985–2023 StataCorp LLC, College Station, TX, USA. All rights reserved.



For suggested citations, see the FAQ on [citing Stata documentation](#).